Wechat Whatsapp



JIANGSHAN DIYI FIRE EQUIPMENT CO.,LTD

: +86 13605827692 : +86 13605827692 / +86 15867963998

: www.howdyfire.com : sales_alex@howdyfire.com

: NO.16 RIYUE ROAD, RIYUE VILLAGE, XINTANGBIAN TOWN,JIANGSHAN CITY,ZHEJIANG PROVINCE,CHINA

HOWDY®

2026

Product Introduction





ABOUT US

Jiangshan Diyi Fire Equipment Co., Ltd. has stood as a bastion of reliability and innovation in this vital industry. With a foundational commitment to excellence, we have evolved from a specialized manufacturer into a global leader, serving a diverse clientele across more than 50 countries. Our factory covers an area of 25,000 square meters and produces a full range of fire extinguishers in various sizes.Our factory has an annual production capacity of 2,500,000 fire extinguishers..Backed by a professional sales team of over 30 members, we are committed tcdelivering exceptional service. As a fire extinguisher manufacturer, we fully support OEM and ODM orders.Furthermore, fire extinguisher are regard as 2.2 Class dangerous goods by Shipping Company, We have good relationship , comprehensive certificates and dangerous goods export documentation.leveraging our robust network, we can serve as a one-stop shop for all your fire safety product needs.



AMPLE SUPPLY OF FIREFIGHTING EQUIPMENT

CUSTOMIZATION & FAST SHIPPING

ONE-PIECE DROP SHIPPING

OEM/ODM FACTORY

DUTY TO PROTECT ALL

20+

YEARS FIRE EXTINGUISHER MANUFACTURING EXPERIENCE

50+

EXPORTED TO COUNTRIES



- EN3 /CE /ISO CERTIFIED
- OEM & ODM SUPPORTED
- FAST DELIVERY & STABLE QUALITY













FIRE EXTINGUISHER

HOWDY®

Guard Safety ·
Use Fire Extinguishers Properly

Fire Is Ruthless ·
Prevention Is Effective ·

JIANGSHAN DIYI FIRE EQUIPMENT CO.,LTD

OUR MAIN PRODUCT RANGE

Firefighting Equipment Manufacturer

Fire Extinguisher	1
Fire Extinguisher Parts	2
Fire Alarm Equipment	3
Firefighting Suits	4
Fire Hose Series	5
Fire Extinguisher Machine	6
Others	7

https://www.howdyfire.com/



1Kg ABC Powder

Fire Rating:	5A/21B/C
Thickness:	0.8mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	49.5*19*31cm/10pcs



2Kg ABC Powder

Fire Rating:	8A/34B/C
Thickness:	1.0mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	46*12*39cm/4pcs



3Kg ABC Powder

Fire Rating:	21A/55B/C
Thickness:	1.0m
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	44*27*14cm/2pcs



4Kg ABC Powder

Fire Rating:	21A/89B/C
Thickness:	1.0mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	50*27*14cm/2pcs



5Kg ABC Powder

Fire Rating:	21A/113B/C
Thickness:	1.2mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	52*31*16cm/2pcs



6Kg ABC Powder

Fire Rating:	27A/113B/C
Thickness:	1.2mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	52*33*17cm/2pcs



8Kg ABC Powder

Fire Rating:	34A/144B/C
Thickness:	1.2mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	58*33*17cm/2pcs



9Kg ABC Powder

Fire Rating:	34A/144B/C
Thickness:	1.5mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	58*19*19cm/1pcs



10Kg ABC Powder

Fire Rating:	43A/144B/C
Thickness:	1.5mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	62*19*19cm/1pcs



12Kg ABC Powder

Fire Rating:	43A/183B/C
Thickness:	1.5mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	66*19*19cm/1pcs



1Kg Powder

Fire Rating:	5A/21B/C
Thickness:	1.0mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	49.5*19*31cm/10pcs



2Kg Powder

Fire Rating:	8A/34B/C
Thickness:	1.0mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	46*12*39cm/4pcs



4Kg Powder

Fire Rating:	21A/89B/C
Thickness:	1.0mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	50*14*14cm/1pcs



6Kg Powder

Fire Rating:	27A/113B/C
Thickness:	1.2mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	52*17*17cm/1pcs



9Kg Powder

Fire Rating:	34A/144B/C
Thickness:	1.5mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	58*19*19cm/1pcs



12Kg Powder

Fire Rating:	43A/183B/C
Thickness:	1.5mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	66*19*19cm/1pcs



1Kg CE

Fire Rating:	5A/21B/C
Thickness:	1.0mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	47*18*34cm/10pcs



2Kg CE

Fire Rating:	8A/34B/C
Thickness:	1.0mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	46*12*39cm/4pcs



3Kg CE

Fire Rating:	21A/55B/C
Thickness:	1.0mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	44*27*14cm/2pcs



4Kg CE

Fire Rating:	21A/89B/C
Thickness:	1.0mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	50*17*17cm/1pcs



6Kg CE

Fire Rating:	27A/113B/C
Thickness:	1.2mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	52*17*17cm/1pcs



9Kg CE

Fire Rating:	34A/144B/C
Thickness:	1.5mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	58*19*19cm/1pcs



10Kg CE

Fire Rating:	43A/144B/C
Thickness:	1.5mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	62*19*19cm/1pcs



12Kg CE

Fire Rating:	43A/183B/C
Thickness:	1.5mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	66*19*19cm/1pcs

Prevent Fires · Stay Safe



1Kg

Fire Rating:	5A/21B/C
Thickness:	0.8mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	49.5*19*31cm/10pcs



2Kg

Fire Rating:	8A/34B/C
Thickness:	1.0mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	46*12*39cm/4pcs



4Kg

Fire Rating:	21A/89B/C
Thickness:	1.0mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	50*27*14cm/2pcs



6Kg

Fire Rating:	27A/113B/C
Thickness:	1.2mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	52*33*17cm/2pcs



9Kg

Fire Rating:	43A/144B/C
Thickness:	1.5mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	58*19*19cm/1pcs



12Kg

Fire Rating:	43A/183B/C
Thickness:	1.5mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	66*19*19cm/1pcs





ITEM NO	FIRE RATING	THICKNESS	W.P	T.P	CARTON SIZE
2Kg CO_2	34B	4.0mm	150Bar	220Bar	49*26*12cm/2pcs
3Kg CO_2	34B	4.0mm	150Bar	220Bar	53*30*14cm/2pcs
5Kg CO_2	55B	4.5mm	150Bar	220Bar	66*21*16cm/1pcs
7Kg CO_2	75B	4.5mm	150Bar	220Bar	85*21*16cm/1pcs
9Kg CO_2	85B	4.5mm	150Bar	220Bar	104*21*16cm/1pcs



ITEM NO	FIRE RATING	THICKNESS	W.P	T.P	CARTON SIZE
4Kg	21A/113B/C	1.2mm	14Bar	25Bar	31*31*35cm/1pcs
6Kg	34A/183B/C	1.2mm	14 Bar	25Bar	31*31*35cm/1pcs
9Kg	43A/233B/C	1.5mm	14Bar	25Bar	33*33*35cm/1pcs
12Kg	55A/233B/C	1.5mm	14Bar	25Bar	33*33*35cm/1pcs



4L FOAM	
Fire Rating:	13A/70B
Thickness:	1.0mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	50*27*14cm/2pcs



4L WATER	
Fire Rating:	13A
Thickness:	1.0mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	50*27*14cm/2pcs



6L FOAM	
Fire Rating:	21A/113B
Thickness:	1.2mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	52*33*17cm/2pcs



6L WATER	
Fire Rating:	21A
Thickness:	1.2mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	52*33*17cm/2pcs



9L FOAM	
Fire Rating:	27A/183B
Thickness:	1.5mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	62*19*19cm/1pcs



9L WATER	
Fire Rating:	27A
Thickness:	1.5mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	62*19*19cm/1pcs





1Kg SS POWDER

Fire Rating:	5A/21B/C
Thickness:	0.8mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	49.5*19*31cm/10pcs



2Kg SS POWDER

Fire Rating:	8A/34B/C
Thickness:	1.0mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	46*12*39cm/4pcs



3Kg SS POWDER

Fire Rating:	21A/55B/C
Thickness:	1.0mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	44*27*14cm/2pcs



4Kg SS POWDER

Fire Rating:	21A/89B/C
Thickness:	1.0mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	50*27*14cm/2pcs



5Kg SS POWDER

Fire Rating:	21A/113B/C
Thickness:	1.2mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	51*31*16cm/2pcs



6Kg SS POWDER

Fire Rating:	27A/113B/C
Thickness:	1.2mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	52*33*17cm/2pcs



8Kg SS POWDER

Fire Rating:	34A/144B/C
Thickness:	1.2mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	58*33*17cm/2pcs



9Kg SS POWDER

Fire Rating:	34A/144B/C
Thickness:	1.5mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar
Carton Size:	62*19*19cm/1pcs



25Kg

Fire Rating:	55A/233B/C
Thickness:	2.0mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar



10Kg

Fire Rating:	70B
Thickness:	4.5mm
MAX Working Pressure:	150Bar
Test Pressure:	225Bar



50Kg

Fire Rating:	89A/233B/C
Thickness:	2.0mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar



24Kg

Fire Rating:	113B
Thickness:	5.0mm
MAX Working Pressure:	150Bar
Test Pressure:	225Bar



75Kg

Fire Rating:	113A/377B/C
Thickness:	2.0mm
MAX Working Pressure:	18Bar
Test Pressure:	27Bar



50Kg

Fire Rating:	183B
Thickness:	5.0mm
MAX Working Pressure:	150Bar
Test Pressure:	225Bar



Factory Customization:

Your Vision, Our Manufacturing Expertise

We recognize that global markets have unique requirements. Our "Customization" and OEM/ODM services are a direct extension of our production flexibility. We don't just sell you a product; we become your manufacturing arm.

Prevent Fires · Stay Safe
HOWDY®






A


B


C


D


E


F


A
B
C
D
E
F
G
H
I
J
K
L








HOWDY






RECHARGE
OVERCHARGED
USE WITH DRY CHEMICAL ONLY
ALARM BELL
24V DC
FIRE
PUSH IN
PULL DOWN
PRESS
HERE
ISO 9001









Model	
Description	ABC Dry Chemical Powder
Main Ingredient	Ammonium Phosphate,Ammonium Sulphate
Percentage	10% to 90%
Color Available	Green,Pink,Blue,Yellow or as per client's request.
Standard	ISO,EN615,UL
Packing	25kg/bag,25/ctn,1 ton/pallet











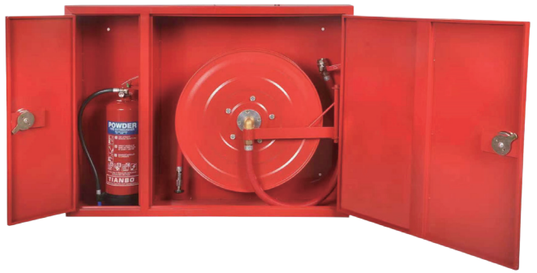













EXTINGUISHER
FIRE HOSE REEL CABINET


FIRE EXTINGUISHER
FIRE EXTINGUISHER
FIRE EXTINGUISHER

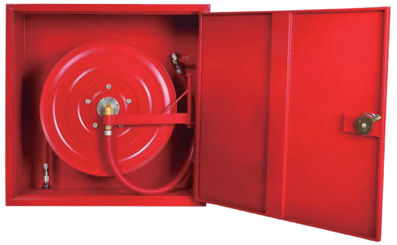

HOSE REEL CABINET




HOSE REEL CABINET








FIRE
HOSE
REEL


FIRE
HOSE


ESTINTORE












FIRE HOSE 20BAR 2.5"x15M












粉源
被灌装灭火器








多功能灭火器维修站




Firebeater


Firebeater


FIRE STOP
ВОГНЕГАСНИК
ISO9001


FIRE STOP


HOWDY®
HEAT AEROSOL FIRE EXTINGUISHING DEVICE
Factory: Jiangshan Diyi Fire Equipment CO.,LTD
Operating Temperature Range: -50°C to +90°C
Service Life: 10 years
Extinguishing Density: 100g/m³
Surface Temperature of Casing: ≤200°C
Thermal Clearance:
0.3m ≤75°C 0.12m ≤200°C 0.05m ≤400°C
Oxidizer & Content: Sr(NO3)2 60% / KNO3 20%
Compliance Standard: EN 15276-1:2019, EN 15276-2:2019
Manufacturing Date & Serial No.:
Refer to the certification.
Important
1.After discharge, do not touch the device before the casing cools down to avoid burns.
2.Automatic fire extinguishing activates at open flame or 175°C.
3.Do not open without professional authorization.


Feng'an
Heat aerosol fire extinguishing device
Dongguan Feng'an Security Technology Co., Ltd


FIRE Blanket
PULL TAPES TO RELEASE


FIRE Blanket
PULL TAPES TO RELEASE








Fire Extinguisher Ball
AFO
AUTO FIRE OFF